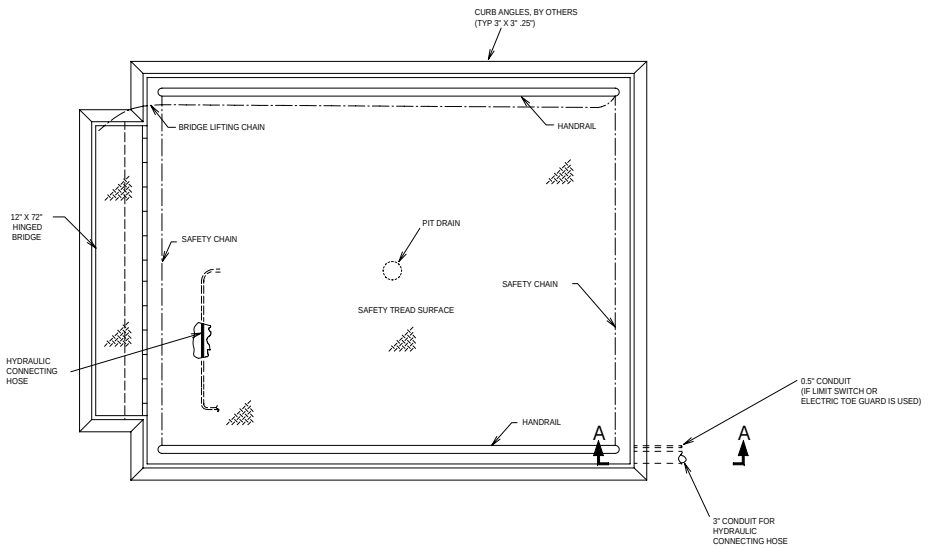

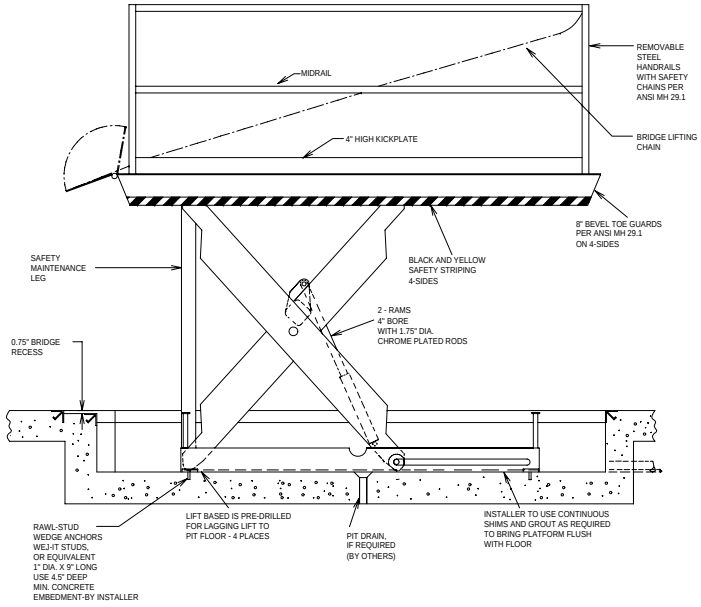

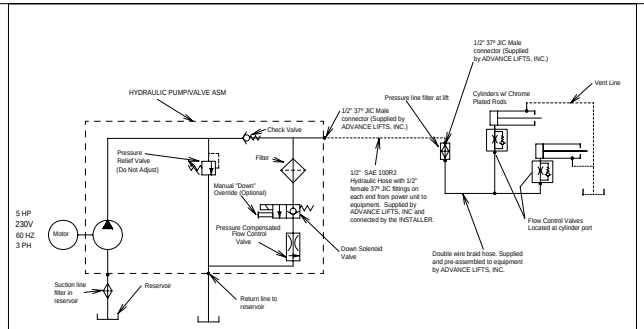

HYDRAULIC DIAGRAM

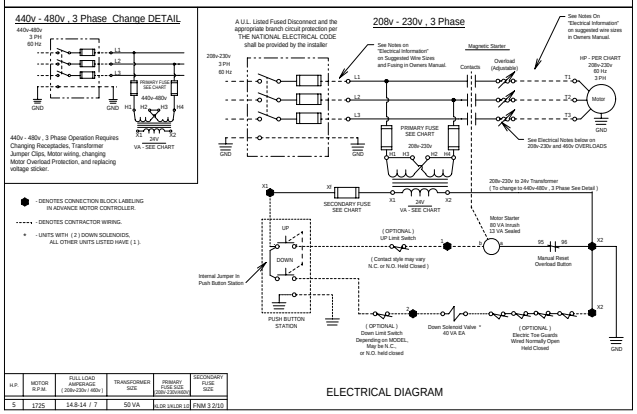

H.P.	MOTOR R.P.M.	FULL LOAD AMPERAGE (208v-230v / 460v)	TRANSFORMER SIZE	PRIMARY FUSE SIZE (DUAL ELEMENT)	SECONDARY FUSE SIZE
5	1725	14.8-14 / 7	50 VA	ATDR 1/4 (208-230)	FNM 3 2/10

ELECTRICAL DIAGRAM

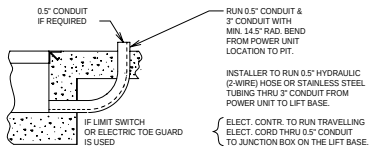

SECTION A - A

GENERAL NOTES:

1. ALL AXLES AND SHAFTS ARE CHROME PLATED.

2. ALL ROLLERS AND PIVOT POINTS ARE EQUIPPED WITH TEFLON SELF-LUBRICATING BEARINGS.

3. ADVANCE LIFTS, INC. TO SUPPLY 10 GALLONS OF A MULTI VISCOSITY ISO-46 GROUP II BASE OIL & (1) 20' .5" EXTRA HEAVY DOUBLE WIRE BRAID HOSE (SAE 100R2) FOR THE POWER UNIT TO THE EQUIPMENT CONNECTION WITH .5" JIC FEMALE FITTINGS ON THE ENDS.

4. REINFORCE CONCRETE TO SUIT LOCAL SOIL CONDITIONS PLUS YOUR DESIRED SAFETY FACTORS.

5. OVERALL POWER UNIT SIZE:
26" WIDE X 22" LONG X 21" HIGH (INCLUDING MOTOR, AND BRACKETS FOR WALL MOUNTING).

6. CONCRETE WORK, REINFORCING, BUILDING MODIFICATIONS, PIPING, ELECTRICAL WIRING, EMBEDDED ITEMS, INSTALLATION, ETC. (BY OTHERS)

7. ADVANCE LIFTS, INC. TO SUPPLY:
- (1) 20' LG. PUSHBUTTON CORD.
- 20' LENGTH OF .25 O.D. CLEAR POLYURETHANE TUBING FOR THE VENT LINES.

8. FINISH: BLUE PAINT

SPECIFICATIONS:

CAPACITY : 8,000 LBS MAX. LIFTING CAPACITY
6,500 LBS MAX. AXLE CAPACITY ENDS
5,000 LBS MAX. AXLE CAPACITY SIDES

PLATFORM : 96" X 120",
SAFETY TREAD DECK,
REMOVABLE HANDRAILS - STEEL
12" X 72" STEEL BRIDGE WITH CHAIN
BEVEL TOE GUARDS
SAFETY STRIPING

SPEED : 10 FPM

TRAVEL : 58" (FROM A 15" LOWERED HEIGHT)

LOWERED HEIGHT : 15"

POWER UNIT : 5 HP MOTOR 230 V 60 Hz 3PH
(REMOTE FROM LIFT)

CONTROL: UP-DOWN WEATHER-PROOF PUSHBUTTON
STATION, PENDANT TYPE NEMA 1, 3, 3R, 4, 4X.

IN NEMA 12 ENCLOSURE : MAGNETIC STARTER,W/ OVERLOAD
230 V TO 24 V CONTROL TRANSFORMER,

APPROXIMATE SHIPPING WEIGHT: #5,000

DO NOT SCALE DRAWING

ADVANCE LIFTS
Advance Lifts, Inc. 701 S. Kirk Rd.
St. Charles, IL 60174
Phone: 630-584-9881 Fax: 630-584-9405

JOB NAME: X
JOB NUMBER: X
SCALE: X
DATE: X
DRN: X CHD:
APVD:

REVISIONS	BY	DATE

TITLE: SUPERDOK
MODEL 3280
NO. D-
REV.