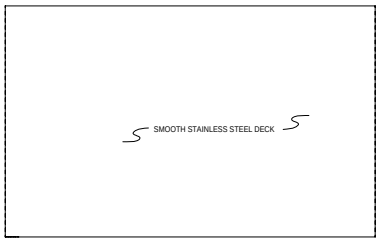

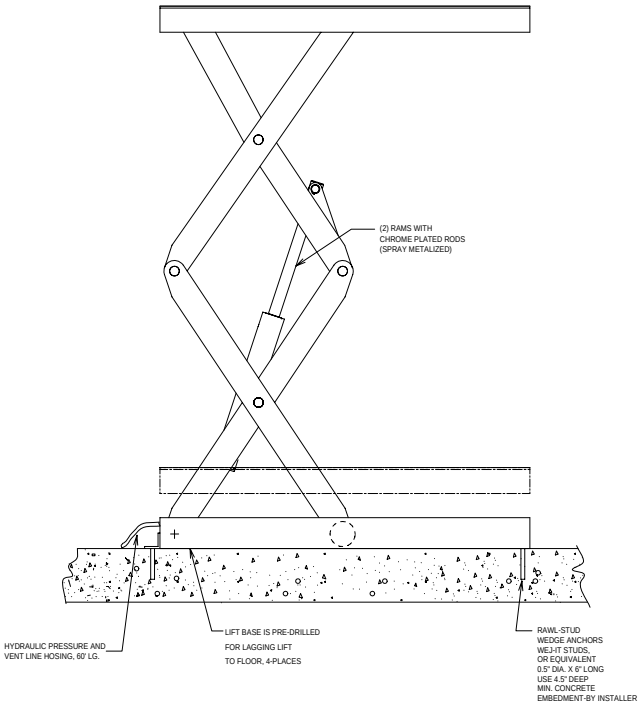

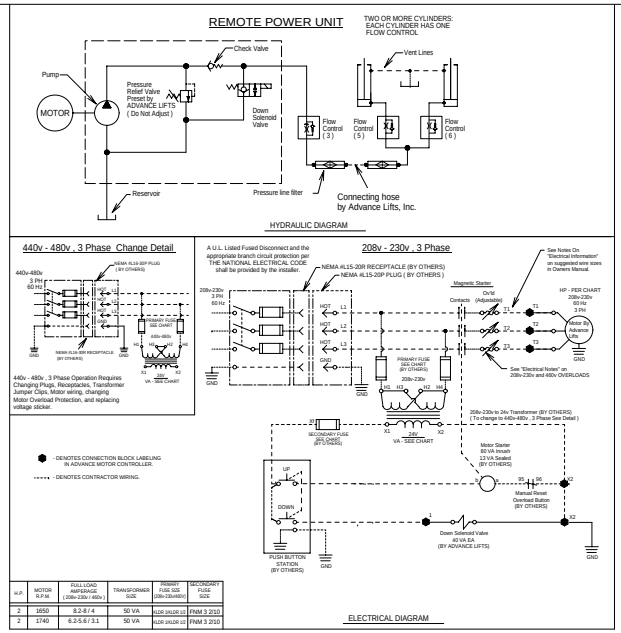

H.P.	MOTOR R.P.M.	FULL LOAD AMPERAGE 208v-230v / 460v)	TRANSFORMER SIZE	PRIMARY FUSE SIZE (208v-230v/460v)	SECONDARY FUSE SIZE
2	1650	8.2-8 / 4	50 VA	KLDR 15A/DR 10	FNM 3 2/10
2	1740	6.2-5.6 / 3.1	50 VA	KLDR 15A/DR 10	FNM 3 2/10

GENERAL NOTES:

1. ALL AXLES AND SHAFTS ARE CHROME PLATED.

2. ALL ROLLERS AND PIVOT POINTS ARE EQUIPPED WITH TEFLON SELF-LUBRICATING BEARINGS.

3. ADVANCE LIFTS TO FURNISH (5) GALLONS OF A BIODEGRADABLE OIL FOR POWER UNIT.

4. ADVANCE LIFTS TO SUPPLY:

   (1) NEMA 4 CONTROL BOX, WITH TERMINAL STRIPS FOR MOTOR & 24 VAC DOWN SOLENOID WIRING ONLY. PUSHBUTTON & ELECTRICAL CONTROLS BY OTHERS.

   (1) 5FT. LG. PRESSURE HOSE & VENT LINE TUBING.

5. STAINLESS STEEL STRUCTURE (MILL FINISH)

6. UNIT PROVIDED WITH SAFETY MAINTENANCE DEVICE.

7. FINISH: STAINLESS STEEL MILL FINISH

SPECIFICATIONS:

CAPACITY : 2,000 LBS MAX. LIFTING
1,400 LBS MAX. END LOAD
1,400 LBS MAX. SIDE LOAD

LIFT PLATFORM : 30" X 48"
SMOOTH STAINLESS STEEL DECK

SPEED : 20 SECONDS (UP) APPROX.

TRAVEL : 60" (FROM A 10.5" LOWERED HEIGHT)

LOWERED HEIGHT : 10.5"

POWER UNIT : 2 HP MOTOR 460V 60Hz 3 PH
HIGH PRESSURE PUMP WITH VALVES,
RESERVOIR AND ELECTRICAL
CONTROLLER. (EXTERNAL TO UNIT)

IN NEMA 4 ENCLOSURE : TERMINAL STRIPS FOR MOTOR AND
24 VAC DOWN SOLENOID WIRING ONLY.

RECEPTACLE : NEMA L16-30R (BY CUSTOMER)

APPROXIMATE SHIPPING WEIGHT : 950#

NOTE: ADVANCE TO PROVIDE LIFT ONLY.
PURCHASER TO PROVIDE ANY AND ALL OTHER
SAFETY SKIRTS,ENCLOSURES,GATES,
INTERLOCKS,ETC. NECESSARY FOR INSTALLATION
TO CONFORM TO STATE AND LOCAL SAFETY
AND ELEVATION CODES. CHECK WITH YOUR CODE
ADMINISTRATORS FOR THEIR REQUIREMENTS
FOR YOUR INSTALLATION.

DO NOT SCALE DRAWING

ADVANCE LIFTS
Advance Lifts, Inc. 701 Kirk Rd.
St. Charles, IL 60174
Phone: 630-584-9881 Fax: 630-584-9405

JOB NAME: HAYES & STOLZ

JOB NUMBER: 44280

SCALE	REVISIONS	BY	DATE
DATE 11/10/09			
DRN SR CKD			
APVD			

TITLE: PRODUCTION LIFT
MSL2-260

NO. D-17567

REV.