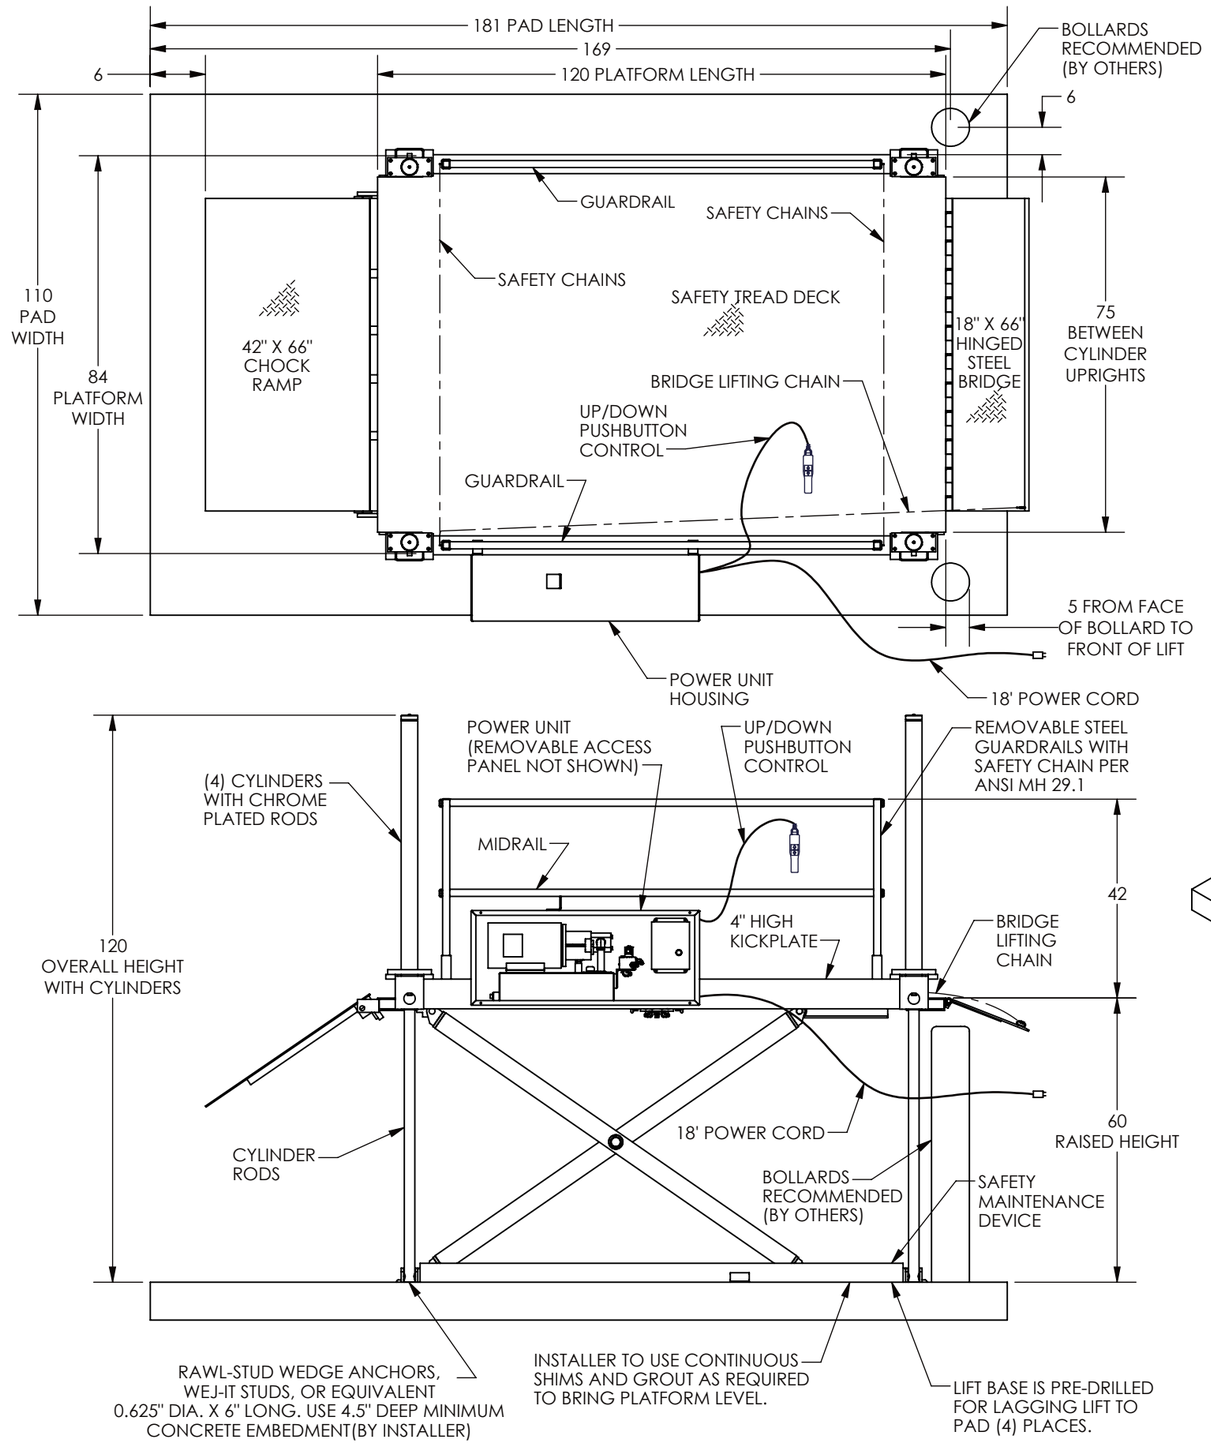


## GENERAL NOTES

1. ALL AXLES AND SHAFTS ARE CHROME PLATED.

2. ALL ROLLERS AND PIVOT POINTS ARE EQUIPPED WITH TEFLON SELF-LUBRICATING BEARINGS.

3. 3" VERTICAL AND 4" HORIZONTAL TOE CLEARANCE SIDES.

4. ADVANCE LIFTS, INC. TO SUPPLY:

-(1) PREWIRED 18' LG. POWER CORD (FROM LIFT BASE TO PLUG).
-(1) UP/DOWN PUSHBUTTON PENDANT TYPE NEMA 1, 3, 3R, 4, 4X.

5. FINSH: BLUE PAINT.

6. TYPICAL ELECTRICAL DIAGRAM FOR THIS UNIT: E22-1320.
TYPICAL HYDRAULIC DIAGRAM FOR THIS UNIT: H13-256.

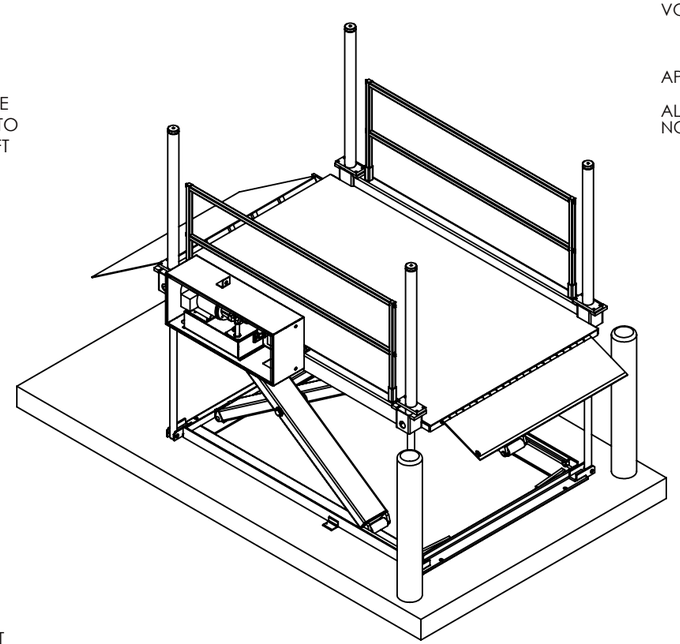

## SPECIFICATIONS:

CAPACITY : 12,000 LBS MAX. LIFTING CAPACITY
9,600 LBS MAX. AXLE CAPACITY ENDS

PLATFORM : 84" X 120" SAFETY TREAD DECK
REMOVABLE GUARDRAILS - STEEL
18" X 66" STEEL HINGED BRIDGE WITH CHAIN
42" X 66" CHOCK RAMP- STEEL
75" BETWEEN CYLINDER UPRIGHT (PLTF WIDTH)
SAFETY CHAINS

SPEED : 11 FPM

TRAVEL : 54" ( FROM A 6" LOWERED HEIGHT )

LOWERED HEIGHT : 6"

POWER UNIT : 7.5 HP MOTOR, 230V 60Hz 3PH
SELF CONTAINED AND PRE-WIRED

CONTROLS : UP/DOWN PUSHBUTTON PENDANT
TYPE NEMA 1, 3, 3R, 4, 4X

IN NEMA 12 ENCLOSURE : MAGNETIC STARTER, W/ OVERLOAD
230V TO 24 V CONTROL TRANSFORMER.

VOLTAGE: 230V / 3PH
ADVANCE TO SUPPLY NEMA L15-30P PLUG
CUSTOMER TO SUPPLY: NEMA L15-30R RECEPTACLE

APPROXIMATE SHIPPING WEIGHT: 5,250 LBS.

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE NOTED.

ADVANCE LIFTS
Advance Lifts, Inc.
701 S. Kirk Road
St. Charles, IL 60174
Phone : 630-584-9881
Fax : 630-584-6837

| SCALE NTS | REVISIONS | BY | DATE |
|---|---|---|---|
| DATE . | . . | . | . |
| DR'N . | | | |
| CHKD | | | |
| JOB NAME . | | | |
| DESC. MODEL 612710 | DWG. B- | | REV. |