


Bridges can be identified by their continuous tube hinges. Ramps are identified by their two pin hinges. All Advance Lifts are designed to accommodate the location of any component configuration. This configuration requires the addition of a pipe stanchion (supplied by Advance) shown in the drawing below, to complete the installation. Please note the mounting detail of pipe stanchion.

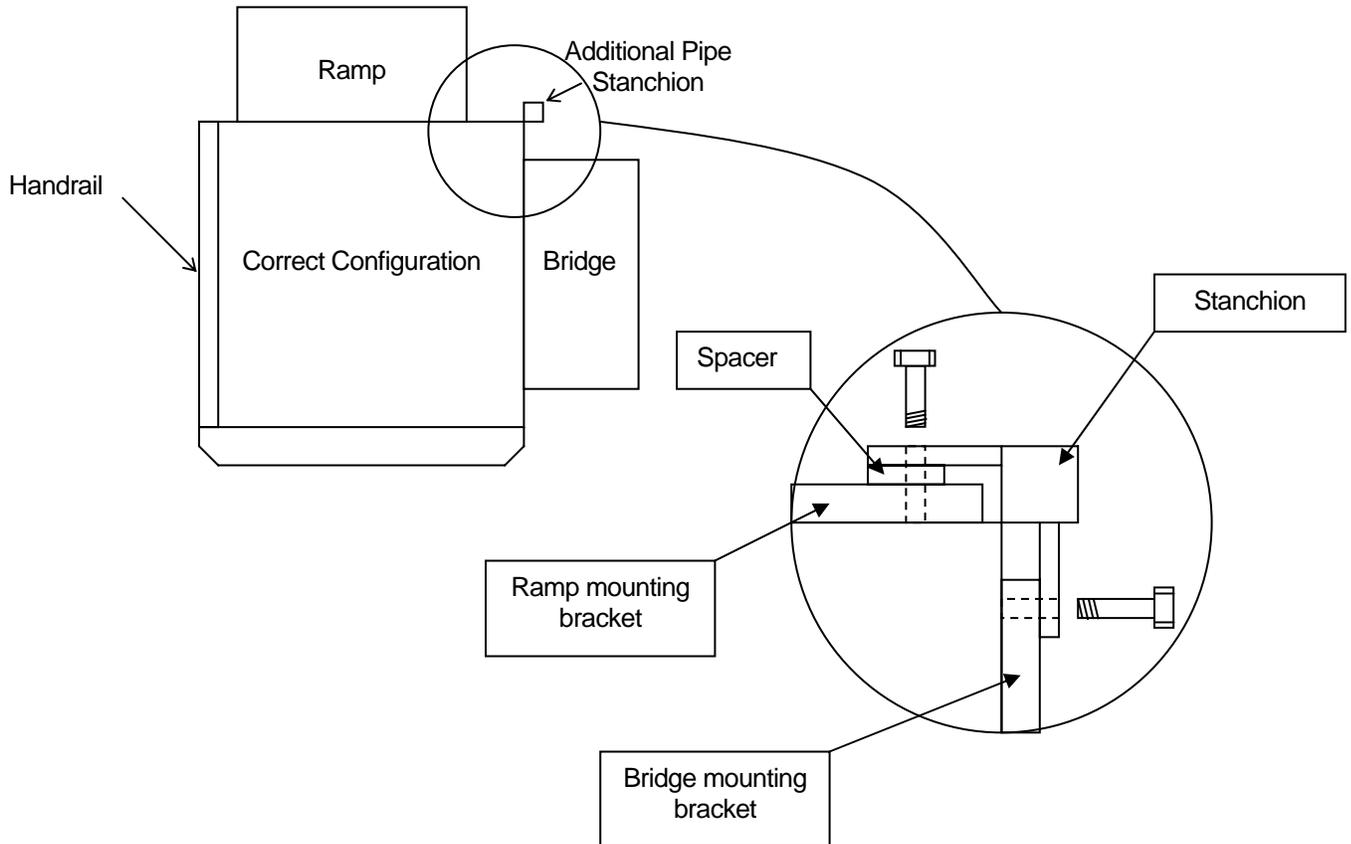

INCLUDE MODEL AND SERIAL NUMBER WITH EVERY ORDER TO
INSURE ACCURACY