
ADVANCE LIFTS®

Electric Tilters (TT)

When Durability Matters

1 year parts and labor\10 year, 250,000 cycle structural warranty

The electric hydraulic tilters are used in workstation applications to eliminate bending and stretching. The tilters tip containers to the workers, reducing fatigue and back injuries.

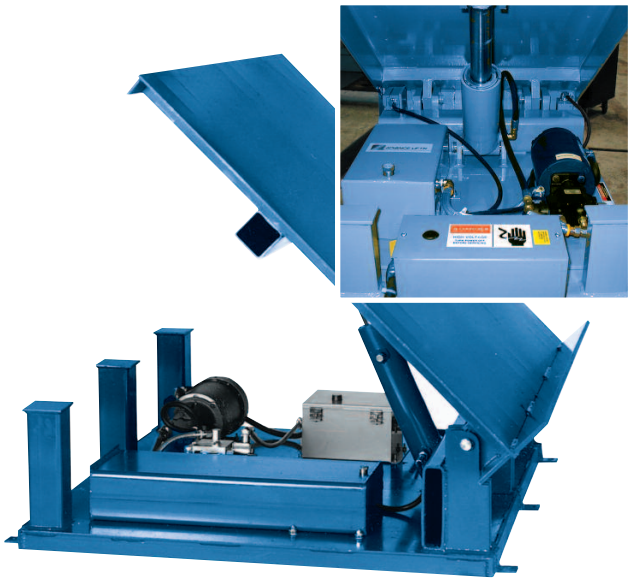

Special Features

- All of the controllers are Underwriter Laboratory listed assemblies.
- The cylinders on 45 and 60 degree tilters are double acting machine grade.
- All units are fully primed and finished with a baked enamel finish.
- All pressure hoses are double wire braid with JIC fittings.
- All reservoirs are mild steel.
- These units conform to all applicable ANSI codes.

Specification Table for Electric Tilters

Model No.	Capacity	Lowered Height	Number of Cylinders	Degrees of Tilt	Min. Platform	Max. Platform	H.P.	Speed Sec.	Approx. Weight
TT-230-8	2000	8	1	30	24 X 36	48 X 48	1	5	400
TT-430-8	4000	8	1	30	24 X 36	48 X 48	1	9	440
TT-630-8	6000	8	1	30	24 X 36	48 X 48	1	9	465
TT-245-8	2000	8	1	45	24 X 36	48 X 48	1	7	405
TT-445-8	4000	8	1	45	24 X 36	48 X 48	1	15	445
TT-645-8	6000	8	1	45	24 X 36	48 X 48	1	15	470
TT-260-8	2000	8	2	60	30 X 36	60 X 60	2	10	410
TT-460-8	4000	8	2	60	30 X 36	60 X 60	2	20	450
TT-660-8	6000	8	2	60	30 X 36	60 X 60	2	20	475

©2020 Advance Lifts, Inc. All rights reserved.