

MODEL TM-608 STANDARD DUTY NON-POWERED, TURNTABLE

10 Year/250,000 Cycle Warranty

Turntables are used for positioning jobs where heavy duty loads must be rotated on a regular basis. There are two basic types of standard duty turntables, non-powered and powered. Turntables are available in low profile and high profile configurations.


**ISO 9001:2015
Certified**



Capacity: 6,000 lbs.
Edge Load Max: 1,500 lbs.
Minimum Platform: 85 x 85 in.
Maximum Platform: 96 x 96 in.
Height: 3.5 in.
Roller Radius: 26
Weight: 1,600 lbs.



6,000 lb. Capacity

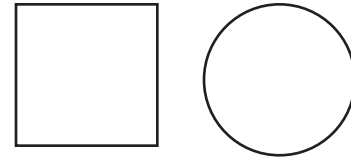

Standard platform is square,
circular is available upon request.

SPECIAL FEATURES & BENEFITS

- ▶ Lower cost than powered turntables.
- ▶ These units are manually rotated.
- ▶ These units can be rotated in either direction.
- ▶ All non-powered turntables are low profile.
- ▶ Standard platforms are rectangular and round platforms are optional on all models except TML.
- ▶ Rotational limits can be provided via optional detents, locking pins, and hard stops.
- ▶ TM platforms are supported by lifetime lubricated roller bearing cam followers.
- ▶ TML platforms are supported by lifetime lubricated ball bearing roller.
- ▶ Platforms rotate around a lifetime-lubricated kingpin bearing.


CLICK HERE FOR: [Optional Accessories](#)

FEATURE DETAILS

OPTIONAL ROTATIONAL LIMITS FOR MANUAL TURNTABLES: DETENTS, LOCKING PINS AND HARD STOPS



▶ *Detent*



▶ *Locking pin*



▶ *Hard stop*