

# MODEL UE-890 90 DEGREES UPENDER


**10 Year/250,000 Cycle Warranty**

*These units are tilters that tilt a full ninety (90) degrees. It is common to equip one platform with a "V" cradle to hold coils or rolls. When this is done we leave a gap of 6", or whatever the customer specifies, to accommodate a pallet at the bottom face of the coil or roll. The upender is then called a roll "palletizer" or "depalletizer". Lifts have been mounted on one of the platforms and so have turntables. If a turntable is mounted, it usually has to be mounted on slides so that it can be pulled away from the adjacent perpendicular face in order to turn a square cornered load.*

**ISO 9001:2015  
Certified**



Capacity: 8,000 lbs.  
Lowered Height: 14 in.  
Tilt Degrees: 90  
Platform A Min.: 48 x 54 in.  
Platform A Max.: 60 x 72 in.  
Platform B Min.: 48 x 48 in.  
Platform B Max.: 60 x 72 in.  
Tilt Speed: 91 sec.  
Internal Motor: 5 HP  
Shipping Weight: 4,000 lbs.

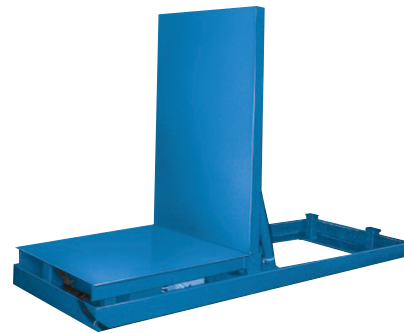

**8,000 lb. Capacity - 90 Degree Tilt**

## SPECIAL FEATURES & BENEFITS

- ▶ All models have hydraulic return lines on the cylinders to preclude oil weepage.
- ▶ All of the controllers are Underwriter Laboratory listed assemblies.
- ▶ All shafts, axles and pins are hard chrome plated.
- ▶ All bearings are lifetime lubricated.
- ▶ These units are fully primed and finished with baked enamel.

**CLICK HERE FOR: [Optional Accessories](#)**