ADVANCE LIFTS®

Concrete Pad Diagrams & Charts

Concrete Pad Diagram For Top of Ground Mounted Lift Models

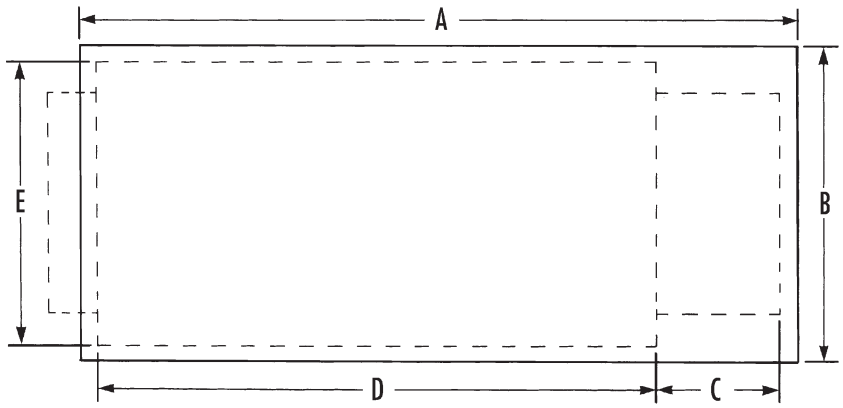

A Concrete Pad Length
B Concrete Pad Width
C Ramp Length
D Lift Length
E Lift Width

Concrete Pad Installation Bill of Materials

1 One (1) Advance Model Number _____.
2 One (1) electric disconnect switch for 5 or 7-1/2HP motor.
3 One (1) plug receptacle.
4 Concrete anchor bolts and material for shimming and/or grouting.

**Seller furnishes items 1 only unless otherwise agreed to in writing.*

Model Number	A	B	C	D	E	F	G	H
6568	145″	96″	30″	96″	72″	60″	60″	86.5″
65610	169″	96″	30″	120″	72″	60″	60″	86.5″
6868	157″	96″	42″	96″	72″	60″	60″	86.5″
68610	181″	96″	42″	120″	72″	60″	60″	86.5″
68710	181″	110″	42″	120″	84″	66″	72″	96″
68810	181″	102″	42″	120″	96″	72″	84″	86.5″*
610610	181″	96″	42″	120″	72″	60″	60″	86.5″
610710	181″	110″	42″	120″	84″	66″	72″	96″
610810	181″	102″	42″	120″	96″	72″	84″	86.5″*
610612	205″	96″	42″	144″	72″	60″	60″	86.5″
610712	205″	110″	42″	144″	84″	66″	72″	96″
610812	205″	102″	42″	144″	96″	72″	84″	86.5″*
612610	181″	96″	42″	120″	72″	60″	60″	86.5″
612710	181″	110″	42″	120″	84″	66″	72″	96″
612810	181″	102″	42″	120″	96″	72″	84″	86.5″*
612612	205″	96″	42″	144″	72″	60″	60″	86.5″
612712	205″	110″	42″	144″	84″	66″	72″	96″
612812	205″	102″	42″	144″	96″	72″	84″	86.5″*
615610	181″	96″	42″	120″	72″	60″	60″	86.5″
615710	181″	110″	42″	120″	84″	66″	72″	96″
615810	181″	102″	42″	120″	96″	72″	84″	86.5″*
615612	205″	96″	42″	144″	72″	60″	60″	86.5″
615712	205″	110″	42″	144″	84″	66″	72″	96″
615812	205″	102″	42″	144″	96″	72″	84″	86.5″*

* Bollard placement changes from "A" - 12.00" to "A" - 7.00"

Notes

A Reinforce concrete to suit local soil conditions.
B All concrete work is the responsibility of the owner or his agent.
C Concrete pad must be flat and level.

Phone: 800-843-3625 • Fax: 630-584-9405 • www.advancelifts.com

©2013 Advance Lifts, Inc. All rights reserved.

Concrete Pad Diagrams & Charts

Standard Installation

STANDARD

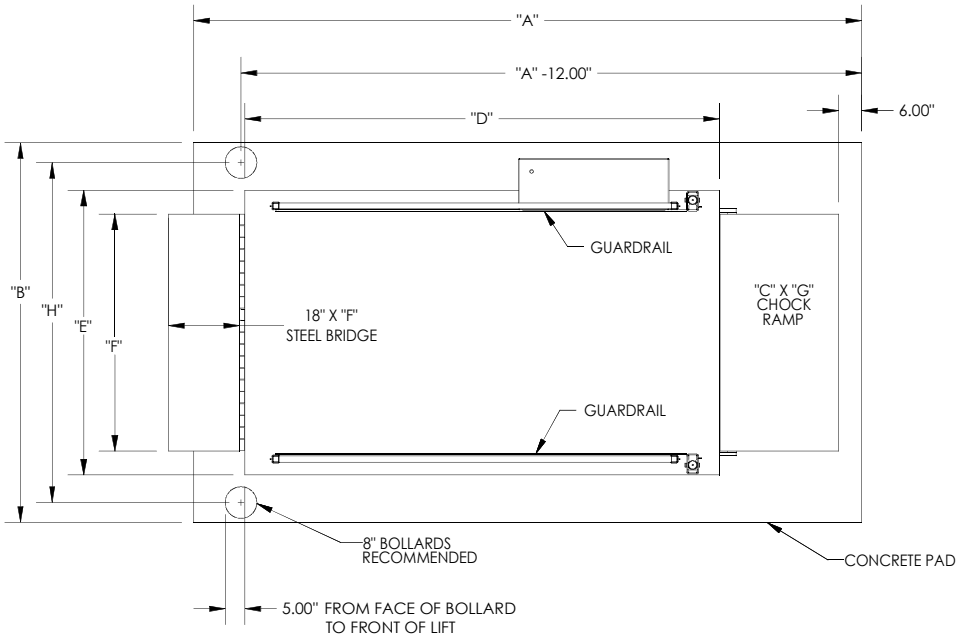

Front of Dock Installation

FRONT OF DOCK

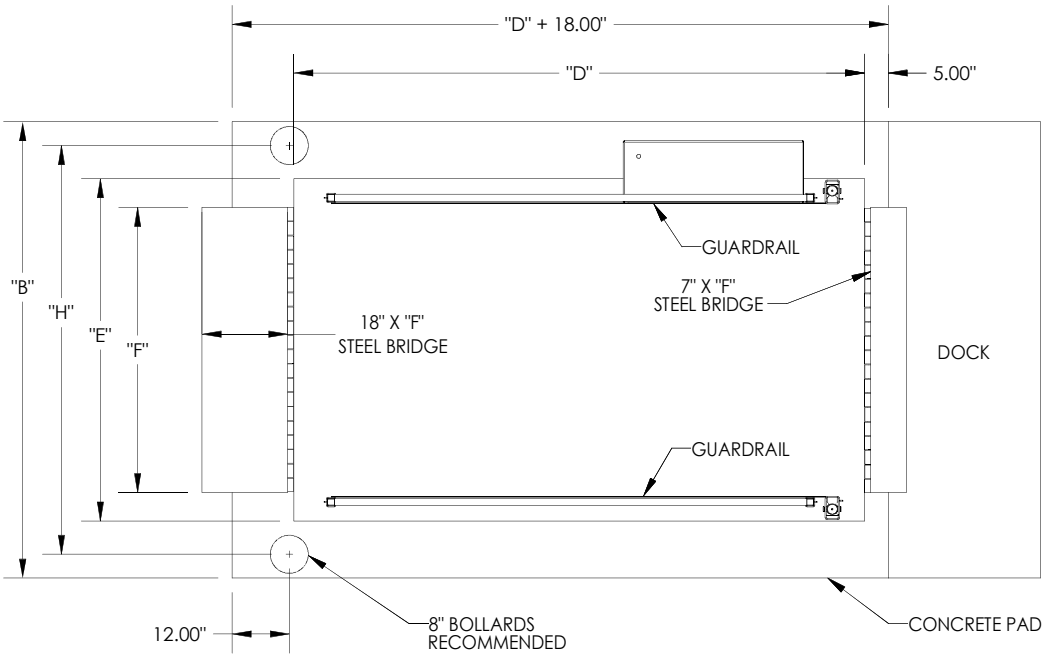

©2013 Advance Lifts, Inc. All rights reserved.